

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
13 June 2002 (13.06.2002)

PCT

(10) International Publication Number  
**WO 02/46277 A1**

(51) International Patent Classification<sup>7</sup>: **C08J 5/18, C08K 3/00**

(21) International Application Number: PCT/US01/44630

(22) International Filing Date:  
29 November 2001 (29.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/251,993 7 December 2000 (07.12.2000) US  
10/036,106 9 November 2001 (09.11.2001) US

(71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 North Lake Street, Neenah, WI 54956 (US).

(72) Inventors: **SCHIFFER, Daniel, K.**; 3608 Tallwood Court, Marietta, GA 30062 (US). **STOPPER, Steven, R.**; 3340 Highgate Hills Drive, Duluth, GA 30097 (US).

(74) Agents: **PETERSEN, Maxwell, J.**; Pauley Petersen Kinne & Erickson, Suite 365, 2800 West Higgins Road, Hoffman Estates, IL 60195 et al. (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BIODEGRADABLE BREATHABLE FILM AND LAMINATE

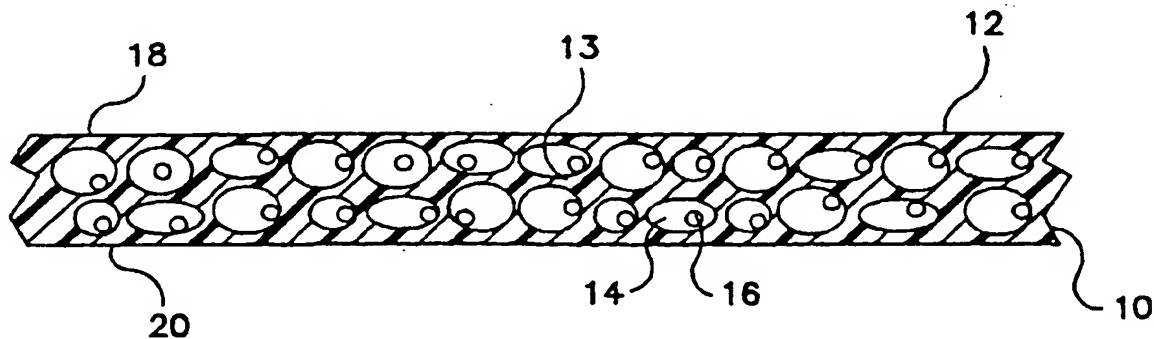

(57) Abstract: A biodegradable breathable film is formed by mixing a biodegradable polymer with a particulate filler, forming the mixture into a film, and stretching the film uniaxially or biaxially to cause voids to form around the filler particles. The film may be laminated to a fibrous nonwoven web to form a laminate, and the fibrous nonwoven web may also be formed from a biodegradable polymer. The biodegradable film and laminate are useful in a wide variety of disposable personal care absorbent articles and disposable medical articles.

WO 02/46277 A1

## BIODEGRADABLE BREATHABLE FILM AND LAMINATE

## FIELD OF THE INVENTION

This invention is directed to a biodegradable breathable film which transmits water vapor and is substantially impermeable to liquid water. The invention is also directed to a breathable laminate including the biodegradable film and a nonwoven web.

## BACKGROUND OF THE INVENTION

Breathable, stretch-thinned films and nonwoven fabric laminates containing them are known in the art. The films are typically prepared by mixing a polyolefin, for example polyethylene or polypropylene, with a particulate inorganic filler, for example calcium carbonate. The mixture is cast or blown into a film. The film may have a single filler-containing layer, or may be coextruded with one or two outer skin layers for improved processing and later bonding to a substrate.

The films are rendered breathable to water vapor by stretching them uniaxially or biaxially, to 1.5 - 7.0 times their original dimension in one or both directions, at an elevated temperature which is below the melting point of the polyolefin. The stretching causes localized separation between the polyolefin and individual filler particles, resulting in void formation around filler particles. The voids are bounded by thin membranes, which may be continuous or broken between adjacent voids. The network of voids and thin polymer membranes creates a tortuous path through the film, through which vapor may diffuse. However, the film remains substantially impermeable to liquid water.

The breathable, stretch-thinned films are commonly laminated on one or both sides to a nonwoven web, such as a spunbond web, to make a breathable barrier laminate. A polypropylene spunbond web, for instance, can serve as an effective load bearing constituent in a wide variety of personal care absorbent articles and medical apparel for which the breathable barrier laminates are employed. The personal care absorbent garments and medical apparel are typically disposable, meaning that they are intended for disposal after one or few uses. Many of these disposable articles end up in landfills, where the polyolefin components are fairly stable and do not readily disintegrate.

There is a need or desire for disposable personal care absorbent garments and medical apparel whose primary structural components are biodegradable. Accordingly,

there is also a need or desire for a breathable barrier film, and a film/nonwoven laminate, formed using one or more biodegradable polymers.

#### SUMMARY OF THE INVENTION

5 The present invention is directed to a breathable, stretch-thinned microporous barrier film including a biodegradable polymer matrix and filler particles dispersed within the matrix. The term "biodegradable" refers to materials which can be readily decomposed by biological means, especially by environmental heat, moisture and/or bacterial action. A suitable test for determining whether or not a plastic material is biodegradable is ASTM D6340-98, entitled "Standard Test Methods For Determining Aerobic Biodegradation of Radiolabeled Plastic Materials In An Aqueous Or Compost Environment". This test  
10 procedure is incorporated by reference. The test procedure relied upon is Method B, which measures cumulative percent oxidation of the plastic material in a controlled compost environment.

15 In accordance with the invention, a biodegradable polymer is mixed with filler particles to form a composition which is made into a film by cast film extrusion, blown film extrusion, or similar techniques. The film is stretch-thinned, desirably at an elevated temperature below the melting point of the matrix polymer, to form voids around the particles. The voids are bound by thin polymer membranes, which may be continuous or broken between adjacent voids. The network of voids and thin polymer membranes creates  
20 a tortuous path through the film, permitting the diffusion of water vapor while substantially blocking penetration by aqueous liquids. The film may have one or more layers. Any additional layers may contain polymer only, or a mixture of polymer and filler.

The present invention is also directed to a breathable laminate including the breathable microporous film and at least one fibrous nonwoven web. The fibrous nonwoven  
25 web is formed from a thermoplastic polymer, desirably a biodegradable thermoplastic polymer. The breathable film and/or laminate may be used in a wide variety of disposable personal care absorbent articles and medical apparel. For instance, the breathable barrier film and/or laminate may be used as an outer cover (backsheet) in diapers, training pants, absorbent swim wear, absorbent underpants, adult incontinence products and feminine hygiene products, and may also be used in baby wipes. The breathable barrier film and/or  
30 laminate may also be used in medical garments, aprons, underpads, bandages, drapes and

wipes. Following disposal in a landfill, the breathable film and/or laminate degrades over a relatively short period of time.

With the foregoing in mind, it is a feature and advantage of the invention to provide a breathable, stretch-thinned barrier film whose structural component (the polymer matrix) is biodegradable.

It is also a feature and advantage of the invention to provide a laminate of the biodegradable film to a fibrous nonwoven web, as well as a laminate whose fibrous nonwoven web is biodegradable.

It is also a feature and advantage of the invention to provide personal care absorbent garments and medical apparel which incorporate the films and laminates of the invention and exhibit improved biodegradability.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a sectional view of a single-layer stretch-thinned breathable film of the invention.

FIG. 2 is a sectional view of a multilayer breathable film of the invention.

FIG. 3 schematically illustrates a process for laminating a breathable film of the invention to a nonwoven web.

FIG. 4 illustrates a laminate including the breathable film of the invention.

#### DEFINITIONS

The term "film" refers to a thermoplastic film made using a film extrusion process, such as a cast film or blown film extrusion process.

The term "biodegradable film" refers to a film whose primary structural component (the matrix polymer) is biodegradable. Whether or not a polymer is biodegradable can be determined from ASTM Procedure D6340-98, as discussed above.

The term "breathable barrier film" refers to a film which is substantially impermeable to liquid water and has a water vapor transmission rate ("WVTR") of at least about 500 grams/m<sup>2</sup>-24 hours using the Mocon procedure described below.

The term "polymer" includes, but is not limited to, homopolymers, copolymers, such as for example, block, graft, random and alternating copolymers, terpolymers, etc., and blends and modifications thereof. Furthermore, unless otherwise specifically limited, the term "polymer" shall include all possible geometrical

configurations of the material. These configurations include, but are not limited to isotactic, syndiotactic and atactic symmetries.

5 The term "biodegradable polymer" refers to a polymer which can be readily decomposed by biological means, such as a bacterial action, environmental heat and/or moisture. Especially suitable are polymers which decompose naturally through the action of bacteria present in the environment or in the ground, as in a landfill. When tested according to ASTM D6340-98, discussed above, a biodegradable polymer is one which is at least 80% dissolved and/or decomposed (oxidized) after 180 days in a controlled compost environment as set forth in the procedure.

10 The term "nonwoven fabric or web" means a web having a structure of individual fibers or threads which are interlaid, but not in a regular or identifiable manner as in a knitted fabric. Nonwoven fabrics or webs have been formed from many processes such as, for example, meltblowing processes, spunbonding processes, air laying processes, and bonded carded web processes. The basis weight of nonwoven fabrics is usually expressed in ounces of material per square yard (osy) or grams per square meter (gsm) and the fiber diameters are usually expressed in microns. (Note that to convert from osy to gsm, multiply osy by 33.91.)

15 The term "microfibers" means small diameter fibers having an average diameter not greater than about 75 microns, for example, having an average diameter of from about 1 micron to about 50 microns, or more particularly, microfibers may have an average diameter of from about 1 micron to about 30 microns. Another frequently used expression of fiber diameter is denier, which is defined as grams per 9000 meters of a fiber. For a fiber having circular cross-section, denier may be calculated as fiber diameter in microns squared, multiplied by the density in grams/cc, multiplied by 0.00707. A lower denier indicates a finer fiber and a higher denier indicates a thicker or heavier fiber. For example, the diameter of a polypropylene fiber given as 15 microns may be converted to denier by squaring, multiplying the result by .89 g/cc and multiplying by .00707. Thus, a 15 micron polypropylene fiber has a denier of about 1.42 ( $15^2 \times 0.89 \times .00707 = 1.415$ ). Outside the United States the unit of measurement is more commonly the "tex," which is defined as the grams per kilometer of fiber. Tex may be calculated as denier/9.

20

25

30

The term "spunbonded fibers" refers to small diameter fibers which are formed by extruding molten thermoplastic material as filaments from a plurality of fine capillaries of a spinnerette having a circular or other configuration, with the diameter of the extruded filaments then being rapidly reduced as by, for example, in U.S. Patent 4,340,563 to Appel et al., U.S. Patent 3,692,618 to Dorschner et al., U.S. Patent 3,802,817 to Matsuki et al., U.S. Patents 3,338,992 and 3,341,394 to Kinney, U.S. Patent 3,502,763 to Hartman, U.S. Patent 3,502,538 to Petersen, and U.S. Patent 3,542,615 to Dobo et al., each of which is incorporated herein in its entirety by reference. Spunbond fibers are quenched and generally not tacky when they are deposited onto a collecting surface. Spunbond fibers are generally continuous and often have average diameters larger than 7 microns, more particularly, between about 10 and 30 microns.

The term "meltblown fibers" means fibers formed by extruding a molten thermoplastic material through a plurality of fine, usually circular, die capillaries as molten threads or filaments into converging high velocity heated gas (e.g., air) streams which attenuate the filaments of molten thermoplastic material to reduce their diameter, which may be to microfiber diameter. Thereafter, the meltblown fibers are carried by the high velocity gas stream and are deposited on a collecting surface to form a web of randomly dispersed meltblown fibers. Such a process is disclosed for example, in U.S. Patent 3,849,241 to Butin et al. Meltblown fibers are microfibers which may be continuous or discontinuous, are generally smaller than 10 microns in diameter, and are generally self bonding when deposited onto a collecting surface. Meltblown fibers used in the invention are preferably substantially continuous in length.

#### DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

Referring to Fig. 1, a breathable monolayer film 10 is shown including a matrix 12, a plurality of voids 14 within the matrix surrounded by relatively thin microporous membranes 13 defining tortuous paths, and one or more filler particles 16 in each void 14. The film 10 is microporous as well as breathable, and the microporous membranes 13 between the voids readily permit molecular diffusion of water vapor from a first surface 18 to a second surface 20 of the film 10.

The matrix 12 can include any suitable film-forming biodegradable polymer. Examples of biodegradable matrix polymers include without limitation polylactic acid polymers (especially homopolymers); polyesters of butanediol, adipic acid, succinic acid and/or terephthalic acid; polycaprolactone polymers; and combinations thereof. An especially suitable polymer is a terpolymer of terephthalic acid, adipic acid and 1,4-butanediol, sold by BASF Corporation under the name ECOFLEX<sup>®</sup>, or a similar polymer sold by Eastman Chemical Co. under the name EASTAR<sup>®</sup>.

The matrix polymer may constitute about 20-95% by weight of the breathable monolayer film 10 (or, in the case of multilayer films described below, that percent of the filled film layer). When the film (after stretching, as described below) is desired to have excellent strength and moderate breathability, the matrix polymer may constitute about 55-95% by weight of the breathable film or film layer, suitably about 60-80% by weight of the breathable film or film layer. In this embodiment, the filler particles 16 may constitute about 5-45% of the breathable film or film layer, suitably about 20-40% by weight. When the film (after stretching) is desired to have superior breathability and moderate strength, the breathable film or film layer may include about 20% to less than 55% by weight of the matrix polymer, suitably about 35-50% by weight; and more than 45% to about 80% by weight of the particulate filler, suitably about 50-65% by weight.

The filler particles 16 may be inorganic filler particles. Suitable inorganic fillers include without limitation calcium carbonate, clays, silica, alumina, barium sulfate, sodium carbonate, talc, magnesium sulfate, titanium dioxide, zeolites, aluminum sulfate, diatomaceous earth, magnesium sulfate, magnesium carbonate, barium carbonate, kaolin, mica, carbon, calcium oxide, magnesium oxide, aluminum hydroxide and combinations of these particles. The mean diameter for the filler particles 16 should range from about 0.1-10 microns, preferably about 0.5-7.0 microns, most preferably about 0.8-2.0 microns.

The filler particles 16 may also be organic filler particles. Examples of organic filler particles that may be used include particles made of polystyrene, polyamides, polyvinyl alcohol, polyethylene oxide, polyethylene terephthalate, polybutylene terephthalate, polycarbonate, polytetrafluoroethylene, and other suitable polymers and derivatives thereof.

The filler particles 16 may be water-swellaable filler particles. By "water-swellaable" it is meant that the particles must be capable of absorbing at least about 10 times their weight, preferably at least about 20 times their weight, most preferably at least about 30 times their weight, in distilled water. Examples of organic water-swellaable fillers include without limitation natural and synthetic superabsorbent materials. Natural superabsorbent materials include guar gum, agar, pectin and the like. Synthetic superabsorbent materials include hydrogel polymers such as alkali metal salts of polyacrylic acids, polyacrylamides, polyvinyl alcohol, ethylene-maleic anhydride copolymers, polyvinyl ethers, methyl cellulose, carboxymethyl cellulose, hydroxypropylcellulose, polyvinylmorpholinone, and polymers and copolymers of vinyl sulfonic acid, polyacrylates, polyacrylamides, polyvinylpyrrolidone, and the like. Other suitable polymers include hydrolyzed acrylonitrile grafted starch, acrylic acid grafted starch, and isobutylene maleic anhydride polymers and mixtures thereof. The hydrogel polymers are preferably lightly crosslinked to render the materials substantially water insoluble. Crosslinking may, for example, be accomplished by irradiation or by covalent, ionic, van der Waals, or hydrogen bonding.

The filler particles 16 may desirably be biodegradable filler particles. Suitable biodegradable filler particles include cyclodextrin. The term "cyclodextrin" includes cyclodextrin compounds and their derivatives which retain the cyclodextrin ring-like structure in all or part of their molecular configurations.

Cyclodextrins may contain from six to twelve glucose units arranged in a ring. Cyclodextrins include, for instance, alpha-cyclodextrin compounds (6 glucose units arranged in a ring), beta-cyclodextrin compounds (7 glucose units arranged in a ring) and gamma-cyclodextrin compounds (8 glucose units arranged in a ring). The coupling and configuration of the glucose units causes the cyclodextrins to have a conical molecular structure with a hollow interior lined by hydrogen atoms and glycoside bridging oxygen atoms.

Suitable cyclodextrin compounds should be in a chemical form which permits them to exist as solid particles having a melting point higher than the desired stretching temperature for the thermoplastic polymer employed in the film, yet lower than the film extrusion temperature. This way, the film can be extruded with the polymer and filler in a molten state, and later stretched somewhat below the melting point of the polymer, without melting the cyclodextrin particles. By melting the filler during



extrusion, processing problems such as die lip build-up are alleviated. Yet to perform its void-initiating function during film stretching, the filler must re-crystallize and remain in a solid particulate state during film stretching. Particles which dissolve in the polymer matrix, or break down and disperse to the point of becoming too small, they may not be effective in causing void formation during stretching of the film 10. In various embodiments, the filler particles 16 may include a mixture of different filler particles (e.g., made from different materials).

The film may be uniaxially or biaxially stretched. The film may be uniaxially stretched to about 1.1-7.0 times its original length, preferably to about 1.5-6.0 times its original length, most preferably to about 2.5-5.0 times its original length. The film may alternatively be biaxially stretched by the same ratios, using conventional techniques familiar to persons skilled in the art. The stretching should occur below the melting temperature of the polymer matrix, suitably about 15-50°F below the melting point of the polymer matrix.

The breathable, stretch-thinned film 10 should have a thickness which facilitates breathability to water vapor, and which also provides structural integrity and liquid barrier. After stretching, the film 10 should have a thickness of about 5-50 microns, preferably about 8-30 microns, most preferably about 10-20 microns. Prior to the orientation, the film 10 can be prepared using cast or blown film extrusion, or another suitable film-forming technique.

Fig. 2 illustrates another embodiment in which a multilayer stretch-thinned breathable film 11 includes a primary breathable core layer 15 coextruded between two outer skin layers 22 and 24. The core layer 15 includes a biodegradable polymer matrix 12, and filler particles 16 surrounded by voids 14. The first outer skin layer 22 includes only a thermoplastic polymer, and is free of filler particles and voids. The second outer skin layer 24 includes a polymer matrix 13, and filler particles 16 surrounded by voids 14 within the matrix 13.

The multilayer film 11 in Fig. 2 illustrates that the outer skin layers 22 and 24 may or may not contain a filler. The core layer 15 may have the same or a similar polymer composition to the monolayer film 10 described with respect to Fig. 1. The outer layers 22 and 24 may contain a softer, lower melting polymer or polymer blend which renders the

outer layers more suitable as heat seal bonding layers for thermally bonding the film to a nonwoven web. When the outer layer (e.g., 22) is free of filler, one objective is to alleviate the build-up of filler at the extrusion die lip which may otherwise result from extrusion of a filled monolayer film. When the outer layer (e.g., 24) contains filler particles and voids,  
5 one objective is to provide a suitable bonding layer without adversely affecting the overall breathability of the film 11.

The thickness and composition of the outer layers 22 and 24 should be selected so as not to substantially impair the moisture transmission through the breathable core layer 15. This way, the breathable core layer 15 may determine the breathability of the  
10 entire film, and the outer layers will not substantially reduce or block the breathability of the film. To this end, the skin layers 22 and 24 should be less than about 10 microns thick, suitably less than about 5 microns thick, desirably less than about 2.5 microns thick. Suitable skin layer polymers include without limitation biodegradable polymers, such as polylactic acid polymers (especially homopolymers); polyesters of butanediol, adipic acid, succinic acid  
15 and/or terephthalic acid; polycaprolactone polymers, and combinations thereof. An especially suitable polymer is a terephthalic acid, adipic acid and 1,4-butanediol, sold by BASF Corporation under the name ECOFLEX®, or by Eastman Chemical Co. under the name EASTAR®.

Regardless of whether the breathable stretch-thinned film is a monolayer  
20 film or a multilayer film, the overall film should be constructed to function as a breathable microporous film. To function properly, the overall film should have a water vapor transmission rate (WVTR) of at least about 500 grams/m<sup>2</sup>-24 hours measured using the Mocon procedure described below. Suitably, the overall film should have an WVTR of at least about 1000 grams/m<sup>2</sup>-24 hours, more suitably at least 2000 grams/m<sup>2</sup>-24 hours,  
25 desirably at least 5000 grams/m<sup>2</sup>-24 hours.

Fig. 3 illustrates an integrated process for forming a breathable microporous film and a film/nonwoven laminate containing it. Referring to Fig. 3, film 10 is formed from a film extrusion apparatus 40 such as a cast or blown unit which could be in-line or off-line. Typically the apparatus 40 will include an extruder 41. Filled resin, including the  
30 biodegradable polymer matrix material, and particulate filler, is prepared in a mixer 43 and

directed to extruder 41. The film 10 is extruded into a pair of nip or chill rollers 42, one of which may be patterned so as to impart an embossed pattern to the newly formed film 10.

From the film extrusion apparatus 40 or off-line rolls supplied, the filled film 10 is directed to a film stretching unit 44 which can be a machine direction orienter, commercially available from vendors including the Marshall and Williams Co. of Providence, Rhode Island. Apparatus 44 has a plurality of pairs of stretching rollers 46, with each subsequent pair moving at progressively faster speed than the preceding pair. The rollers 46 apply an amount of stress and progressively stretch the filled film 10 to a stretched length where the film 10 becomes microporous and breathable. As shown, the film 10 is stretched only in the machine direction, which is the direction of travel of the film 10 through the process in Fig. 3.

Advantageously, the film 10 may be uniaxially stretched to about three times its original length, using an elevated stretch temperature of about 150-200°F for most polyolefin-based films. The elevated stretch temperature can be sustained by heating some of the stretch rollers 46. The optimum stretch temperature varies with the type of matrix polymer in the film 10, and is always below the melting temperature of the matrix polymer. The film 10 may also be biaxially stretched, with the cross-directional stretching occurring before, after or concurrently with the machine direction stretching.

Still referring to Fig. 3, the film 10 may be laminated to nonwoven web 30 immediately after the film is stretched and immediately following manufacture of the nonwoven web. The nonwoven web 30 can be a spunbonded web, a meltblown web, a bonded carded web, or combination thereof. The web can be formed by dispensing polymer filaments 50 from a pair of conventional spinnerettes 48, onto a conveyor assembly 52. The filaments 50 are deposited onto the conveyor to form mat 54. The filaments 50 of mat 54 are then compressed to form inter-filament bonding using a pair of nip rollers 56, resulting in the spunbonded web 30. The spunbonded web 30 is then transported to the calender bonding rollers 58 and is thermally bonded to one side of the film 10. The film 10 in Fig. 3 is simultaneously bonded on its other side to a second material 30a originating from a supply roll 62. The second material 30a may be a second nonwoven web, or another film layer. The resulting laminate 32 is wound and stored onto a supply roll 60.

5 The breathable film may be laminated to one or more fibrous nonwoven substrates, such as a spunbond web, meltblown web, or airlaid web, using conventional adhesive bonding or thermal bonding techniques known in the art. The type of substrate and bonding will vary depending on the particular end use application. An example of a laminate is shown in Fig. 4, wherein a nonwoven web 40 is laminated to a two-layer  
10 breathable film of the invention. In the embodiment shown, the web 40, which can be a spunbonded web made from a biodegradable polymer, is bonded to a voided skin layer 24 of the multilayer film 10, which layer may contain particulate filler particles. The primary filler-containing layer 15 faces away from the nonwoven web 40. The lamination of the film to the nonwoven web may be accomplished using conventional thermal bonding or adhesive bonding techniques. The fibrous nonwoven web may be made from any of the biodegradable polymers listed above for the breathable film. Alternatively, the spunbond web may be made from a suitable polyolefin (e.g., polyethylene or polypropylene), or another thermoplastic polymer.

15 The breathable stretch-thinned biodegradable film and/or laminate containing it may be used in a wide variety of personal care articles and medical articles. The term "personal care articles" includes without limitation diapers, training pants, swim wear, absorbent underpants, baby wipes, adult incontinence products and feminine hygiene products. The term "medical articles" includes without limitation medical garments, aprons,  
20 underpads, bandages, drapes and wipes.

Personal care articles generally include a liquid permeable topsheet, which faces the wearer, and a liquid-impermeable bottom sheet or outer cover. Disposed between the topsheet and outer cover is an absorbent core, and often the topsheet and outer cover are sealed to encase the absorbent core. Personal care articles may be of various shapes such as,  
25 for example, an overall rectangular shape, T-shape or an hourglass shape. The baffle or outer cover may include a breathable liquid-impervious film and/or a laminate thereof such as described herein. The topsheet is generally coextensive with the outer cover but may optionally cover an area that is larger or smaller than the area of the outer cover, as desired. By way of example only, exemplary personal care articles and components thereof are  
30 described in U.S. Patent No. 4,798,603 to Meyer et al., U.S. Patent No. 4,753,649 to

Pazdernick, U.S. Patent No. 4,704,116 to Enloe, U.S. Patent 5,429,629 to Latimer et al.; the entire contents of each of the aforesaid references are incorporated herein by reference.

The topsheet preferably presents a body-facing surface that is compliant, soft to the touch, and non-irritating to the wearer's skin. The topsheet is suitably employed to help isolate the wearer's skin from liquids held in the absorbent core. In order to present a drier surface to the wearer, the topsheet may be less hydrophilic than the absorbent core and also sufficiently porous to be readily liquid permeable. Topsheets are well known in the art and may be manufactured from a wide variety of materials, such as porous foams, reticulated foams, apertured plastic films, natural fibers (i.e., wool or cotton fibers), synthetic fibers (i.e., polyester, polypropylene, polyethylene, etc.), or a combination of natural and synthetic fibers. For example, the topsheet can include a spunbond fiber web of polyolefin fibers or a bonded-carded web composed of natural and/or synthetic fibers. In this regard the topsheet may be composed of substantially hydrophobic material treated with a surfactant or otherwise processed to impart the desired level of wettability and liquid permeability. Exemplary topsheets are described in U.S. Patent No. 5,879,343 to Ellis et al.; U.S. Patent 5,490,846 to Ellis et al.; U.S. Patent 5,364,382 to Lattimer et al. and commonly assigned U.S. Patent Application No. 09/209,177 filed December 9, 1998 to Varona et al.; the entire contents of each of the aforesaid references are incorporated herein by reference.

Between the breathable liquid-impervious outer cover and the liquid pervious topsheet is positioned an absorbent core which typically includes one or more absorbent materials such as, for example, superabsorbent particles, wood pulp fluff, synthetic wood pulp fibers, synthetic fibers and combinations thereof. Wood pulp fluff, however, commonly lacks sufficient integrity alone and has a tendency to collapse when wet. Thus, it is often advantageous to add a stiffer reinforcing fiber such as polyolefin meltblown fibers or shorter length staple fibers, typically provided as a coform material as described, for example, in U.S. Patent 4,818,464 to Lau and U.S. Patent 4,100,324 to Anderson et al. The absorbent core may have any of a number of shapes, the size of which will vary with the desired loading capacity, the intended use of the absorbent article and other factors known to those skilled in the art. The various components of the diaper can be integrally assembled together employing various means of attachment known to those skilled in the art such as, for example, adhesive bonding, ultrasonic bonds, thermal bonds or combinations thereof.

Mocon Test Procedure For Water  
Vapor Transmission Rate (WVTR)

5 A suitable technique for determining the WVTR (water vapor transmission rate) value of a film or laminate material of the invention is the test procedure standardized by INDA (Association of the Nonwoven Fabrics Industry), number IST-70.4-99, entitled "STANDARD TEST METHOD FOR WATER VAPOR TRANSMISSION RATE THROUGH NONWOVEN AND PLASTIC FILM USING A GUARD FILM AND VAPOR PRESSURE SENSOR" which is incorporated by reference herein. The INDA procedure provides for the determination of WVTR, the permeance of the film to water vapor and, for  
10 homogeneous materials, water vapor permeability coefficient.

The INDA test method is well known and will not be set forth in detail herein. However, the test procedure is summarized as follows. A dry chamber is separated from a wet chamber of known temperature and humidity by a permanent guard film and the sample material to be tested. The purpose of the guard film is to define a definite air gap and  
15 to quiet or still the air in the air gap while the air gap is characterized. The dry chamber, guard film, and the wet chamber make up a diffusion cell in which the test film is sealed. The sample holder is known as the Permatran-W Model 100K manufactured by Mocon/Modern Controls, Inc., Minneapolis, Minnesota. A first test is made of the WVTR of the guard film and the air gap between an evaporator assembly that generates 100%  
20 relative humidity. Water vapor diffuses through the air gap and the guard film and then mixes with a dry gas flow which is proportional to water vapor concentration. The electrical signal is routed to a computer for processing. The computer calculates the transmission rate of the air gap and the guard film and stores the value for further use.

The transmission rate of the guard film and air gap is stored in the computer  
25 as CalC. The sample material is then sealed in the test cell. Again, water vapor diffuses through the air gap to the guard film and the test material and then mixes with a dry gas flow that sweeps the test material. Also, again, this mixture is carried to the vapor sensor. The computer then calculates the transmission rate of the combination of the air gap, the guard film, and the test material. This information is then used to calculate the transmission  
30 rate at which moisture is transmitted through the test material according to the equation:

$$TR_{\text{test material}}^{-1} = TR_{\text{test material, guardfilm, airgap}}^{-1} - TR_{\text{guardfilm, airgap}}^{-1}$$

Calculations:

WVTR: The calculation of the WVTR uses the formula:

$$WVTR = F p_{\text{sat}}(T) RH / A p_{\text{sat}}(T) (1 - RH)$$

5

where:

F = The flow of water vapor in cc/min.,

$p_{\text{sat}}(T)$  = The density of water in saturated air at temperature T,

RH = The relative humidity at specified locations in the cell,

A = The cross sectional area of the cell, and,

10

$p_{\text{sat}}(T)$  = The saturation vapor pressure of water vapor at temperature T.

## WE CLAIM:

1. A breathable, stretch-thinned film comprising a mixture of filler particles and a biodegradable thermoplastic polymer, the film having voids formed around the filler particles to facilitate passage of water vapor through the film.
2. The breathable, stretch-thinned film of Claim 1, wherein the biodegradable thermoplastic polymer is selected from polylactic acid polymers; polyesters of butanediol, adipic acid, succinic acid and/or terephthalic acid; and polycaprolactone polymers.
3. The breathable, stretch-thinned film of Claim 1, wherein the biodegradable thermoplastic polymer comprises a terpolymer of butanediol, terephthalic acid, and adipic acid.
4. The breathable, stretch-thinned film of Claim 1, wherein the filler particles comprise inorganic filler particles.
5. The breathable, stretch-thinned film of Claim 4, wherein the filler particles comprise calcium carbonate.
6. The breathable, stretch-thinned film of Claim 1, wherein the filler particles comprise organic filler particles.
7. The breathable, stretch-thinned film of Claim 1, wherein the filler particles comprise water-swellaable filler particles.
8. The breathable, stretch-thinned film of Claim 1, wherein the filler particles comprise biodegradable filler particles.



9. The breathable, stretch-thinned film of Claim 8, wherein the filler particles comprise a cyclodextrin.

10. The breathable, stretch-thinned film of Claim 1, comprising about 5-80% by weight of the filler particles and about 20-95% by weight of the biodegradable polymer.

11. The breathable, stretch-thinned film of Claim 1, comprising about 20-40% by weight of the filler particles and about 60-80% by weight of the biodegradable polymer.

12. The breathable, stretch-thinned film of Claim 1, comprising greater than 45% to about 80% by weight of the filler particles and about 20% to less than 55% by weight of the biodegradable polymer.

13. The breathable, stretch-thinned film of Claim 1, comprising about 50-65% by weight of the filler particles and about 35-50% by weight of the biodegradable polymer.

14. The breathable, stretch-thinned film of Claim 1, wherein the film has been uniaxially stretched.

15. The breathable, stretch-thinned film of Claim 1, wherein the film has been biaxially stretched.

16. A breathable, stretch-thinned film comprising a mixture of about 5-80% by weight filler particles and about 20-95% by weight of a terpolymer of butanediol, terephthalic acid and adipic acid, and having voids formed around the filler particles.

17. A breathable, stretch-thinned multilayer film comprising:  
a primary breathable layer including a mixture of filler particles and a biodegradable thermoplastic polymer, and having voids formed around the filler particles to facilitate passage of water vapor; and  
at least one skin layer.

18. The breathable, stretch-thinned multilayer film of Claim 17, wherein the biodegradable thermoplastic polymer is selected from polylactic acid polymers; polyesters of butanediol, adipic acid, succinic acid and/or terephthalic acid; and polycaprolactone polymers.

19. The breathable, stretch-thinned multilayer film of Claim 17, wherein the skin layer comprises a biodegradable polymer.

20. The breathable, stretch-thinned multilayer film of Claim 19, wherein the skin layer further comprises filler particles, and has voids formed around the filler particles to facilitate the passage of water vapor.

21. A breathable laminate, comprising:  
a breathable, stretch-thinned film including a mixture of filler particles and a biodegradable thermoplastic polymer, the film having voids formed around the filler particles to facilitate passage of water vapor through the film; and  
a fibrous nonwoven web.

22. The breathable laminate of Claim 21, wherein the film and nonwoven web are adhesively bonded together.

23. The breathable laminate of Claim 21, wherein the film and nonwoven web are thermally bonded together.

24. The breathable laminate of Claim 21, wherein the nonwoven web comprises a spunbond web.

25. The breathable laminate of Claim 21, wherein the nonwoven web comprises a meltblown web.

26. The breathable laminate of Claim 21, wherein the nonwoven web comprises an air laid web.

27. The breathable laminate of Claim 21, wherein the nonwoven web comprises a biodegradable polymer.

28. A personal care article comprising the breathable film of Claim 1.

29. A personal care article comprising the breathable film of Claim 16.

30. A personal care article comprising the breathable film of Claim 17.

31. A personal care article comprising the breathable laminate of Claim 21.

32. A medical article comprising the breathable film of Claim 1.


33. A medical article comprising the breathable film of Claim 16.

34. A medical article comprising the breathable film of Claim 17.

35. A medical article comprising the breathable laminate of Claim 21.



3  
F/G

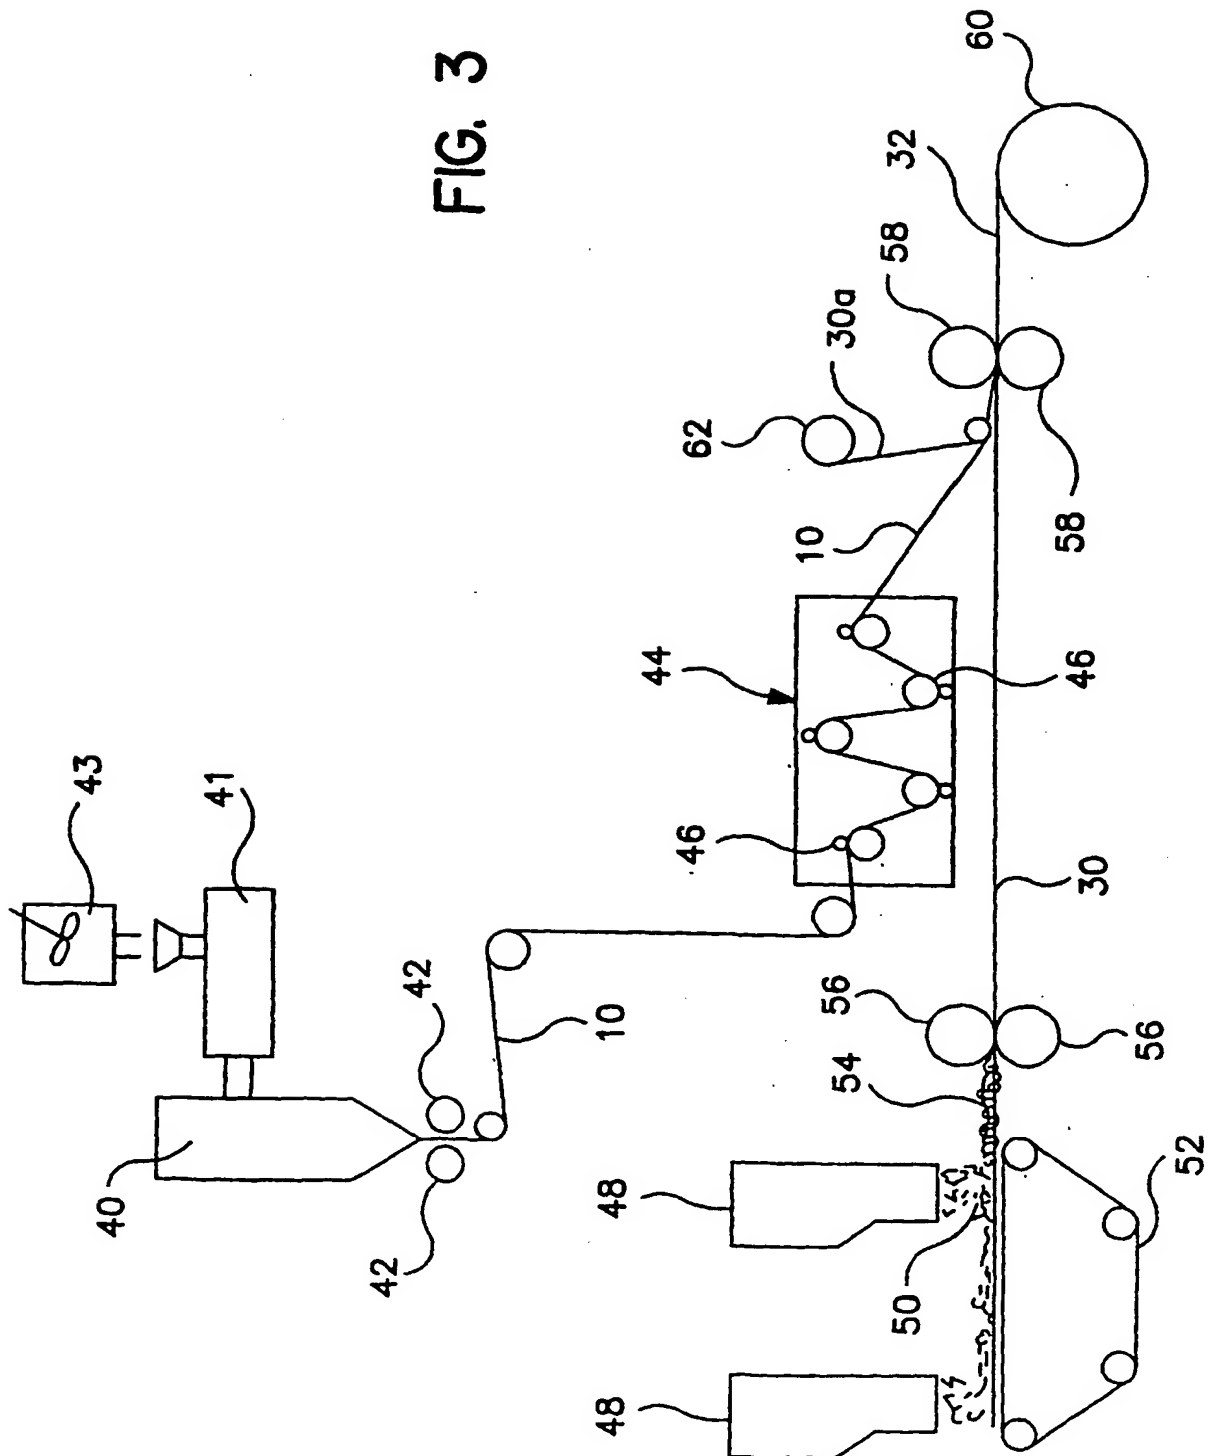

SUBSTITUTE SHEET (RULE 26)

3/3

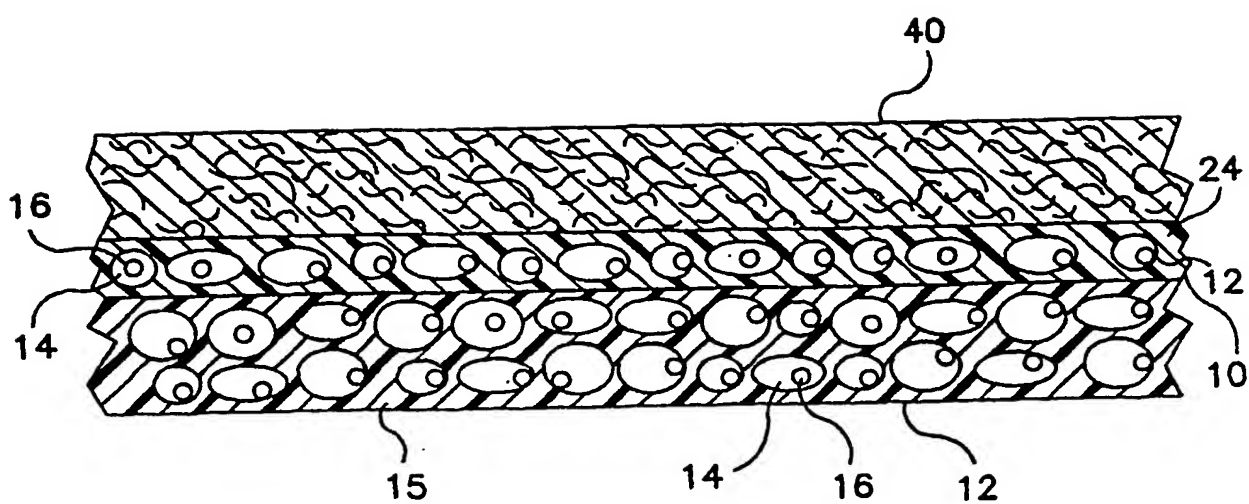


FIG. 4

SUBSTITUTE SHEET (RULE 26)

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/44630

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C08J5/18 C08K3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08J C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 008 629 A (DAICEL CHEM) 14 June 2000 (2000-06-14) paragraphs '0202!-'0204! paragraph '0240! paragraphs '0300!-'0302! claims ----	1-35
X	EP 0 776 927 A (MITSUI TOATSU CHEMICALS) 4 June 1997 (1997-06-04) claim 1 ----	1-27
A	US 6 028 160 A (CHANDLER CHRISTOPHE ET AL) 22 February 2000 (2000-02-22) claim 1 -----	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

25 March 2002

Date of mailing of the international search report

09/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

West, N

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/44630

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1008629	A	14-06-2000	JP 11335913 A	07-12-1999
			JP 11349795 A	21-12-1999
			JP 11346520 A	21-12-1999
			JP 11346575 A	21-12-1999
			JP 2000015765 A	18-01-2000
			JP 2000079651 A	21-03-2000
			JP 2000103025 A	11-04-2000
			JP 2000143379 A	23-05-2000
			JP 2000203978 A	25-07-2000
			JP 2000226501 A	15-08-2000
			JP 2000238194 A	05-09-2000
			JP 2000256471 A	19-09-2000
			EP 1008629 A1	14-06-2000
			JP 200105498 A	27-02-2001
			WO 9963001 A1	09-12-1999
EP 0776927	A	04-06-1997	DE 69613081 D1	05-07-2001
			DE 69613081 T2	07-03-2002
			EP 0776927 A1	04-06-1997
			JP 9208817 A	12-08-1997
			KR 235153 B1	15-12-1999
			US 5766748 A	16-06-1998
US 6028160	A	22-02-2000	EP 0990676 A1	05-04-2000
			US 6156929 A	05-12-2000